

BACKUP WALL - PROVIDE DEFLECTION AND CONTROL JOINTS AS REQUIRED, MAKE THEM WATERTIGHT WITH MEMBRANE FLASHING OVER A BACKER ROD

RIGID OR OTHER MOISTURE TOLERANT INSULATION


CAVITY DRAINAGE MATERIAL

CLAY FACE BRICK

CONTROL JOINT FOR THERMAL MOVEMENT. COMPRESSIBLE FIBER, BACKER ROD, AND SEALANT, BRICKTIES ON EACH SIDE OF THE JOINT, NO MORTAR, BRICK, OR TIE ACROSS OR WITHIN THE JOINT, CLEAN JOINT OF ALL OBSTRUCTIONS

SOLDERED CORNER - PREFABRICATED

SEE DETAIL 4

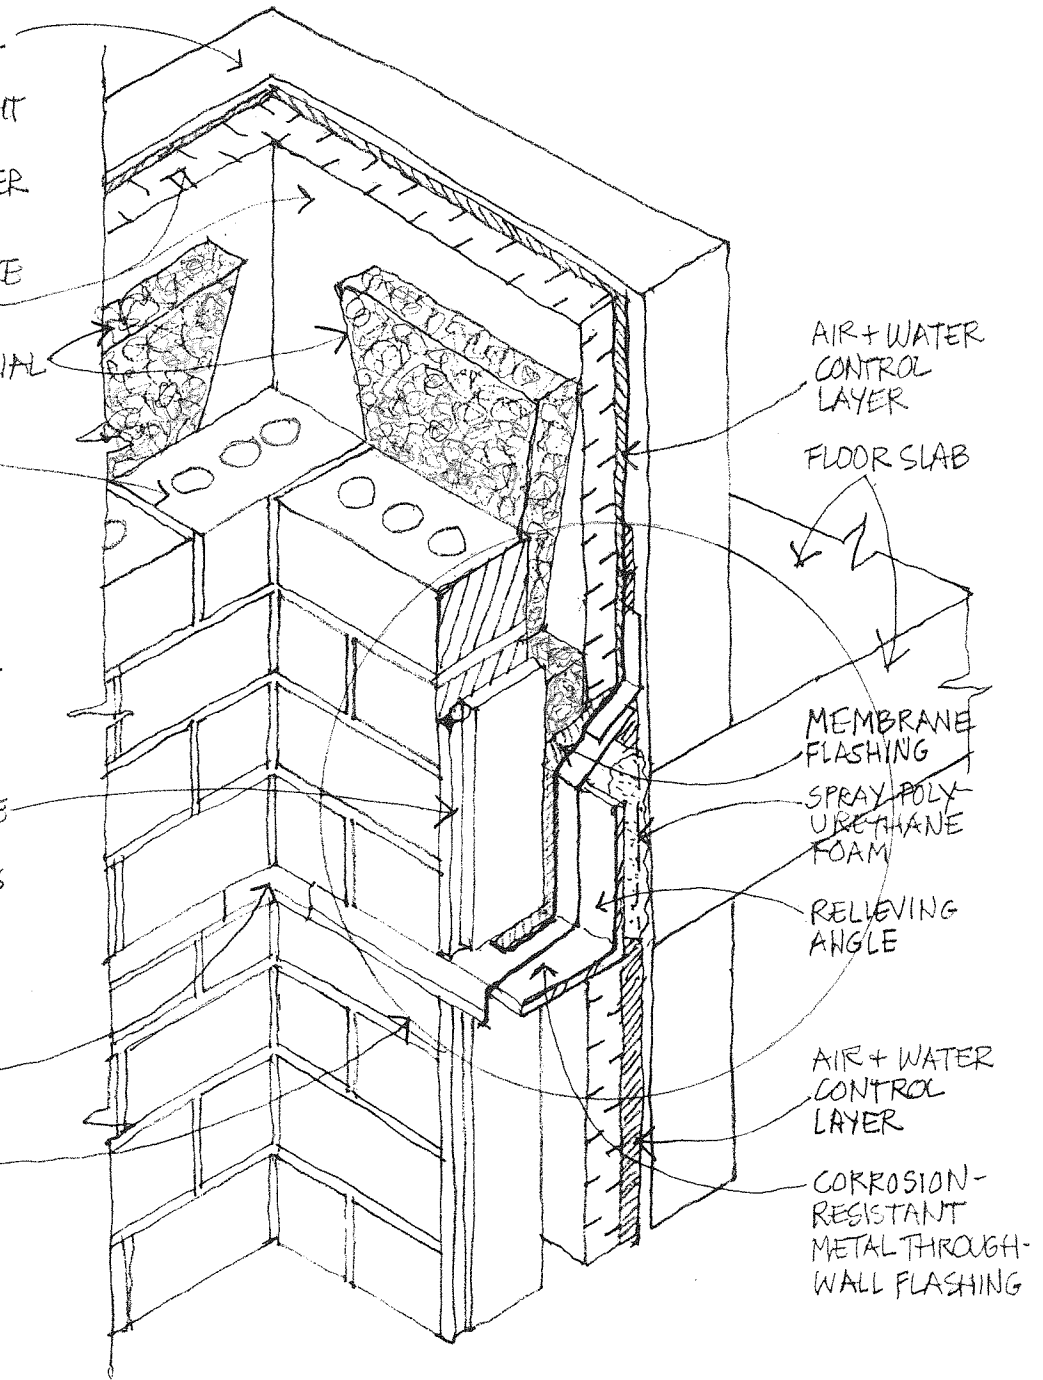

DETAIL 1 - CLAY BRICK INSIDE CORNER